


FP-4000 Fill Panel
0~6000 psi with 4 outlets for SCBA/SCUBA
Dimensions width 15" x height 9 3/8" x depth 5 1/2"
with 4 each bulk head mounting holes

AVAILABLE IN A VARIETY OF OUTLET CONFIGURATIONS

Call for more information

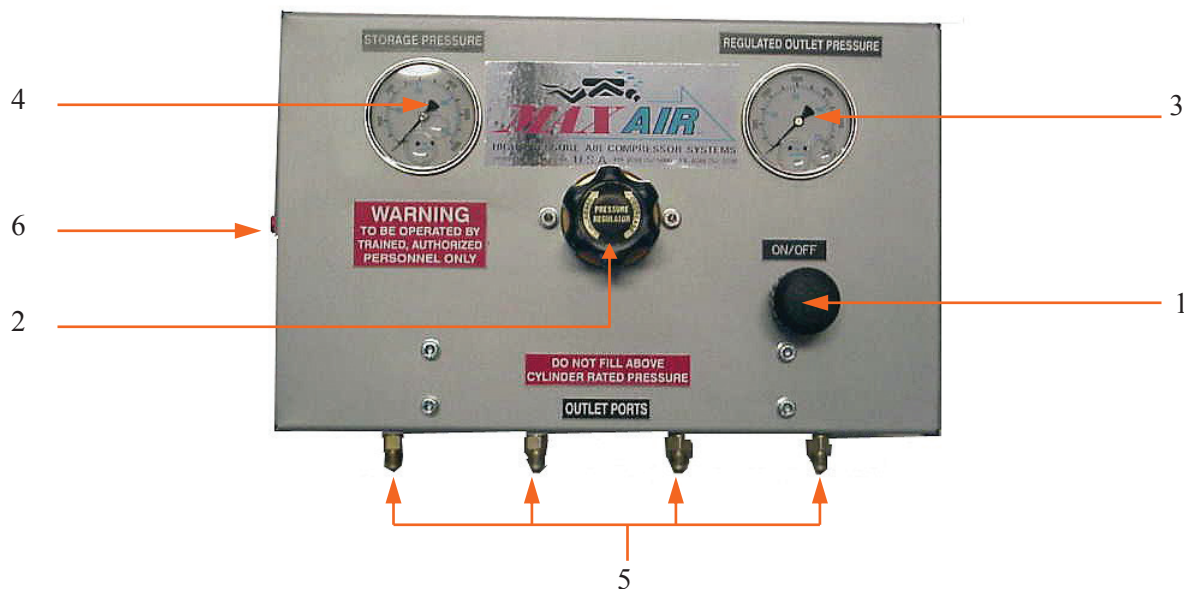

1. On/Off Valve – clockwise to close, counterclockwise to open
2. 0~6000 psi self venting pressure reducing regulator
turn clockwise to increase pressure – counterclockwise to decrease
see instruction sheet #415 **(MAKE SURE YOU MATCH CYLINDER RATED PRESSURE)**
3. 0~6000 psi oil filled stainless steel pressure fill gauge – shows actual filling pressure
4. 0~6000 psi oil filled gauge – shows HP air storage pressure
5. #4 JIC-male outlet ports x 4
6. #4 JIC-male inlet port from HP air storage

NOTE:

AIR BUBBLE IN GAUGE FACE IS FOR EXPANSION AND CONTRACTION OF OIL AT VARIOUS TEMPERATURES.

DO NOT FILL ABOVE CYLINDER RATED PRESSURE OR OUT DATED CYLINDERS!